

PARQUET

2015 Collection



Tarkett

THE ULTIMATE
FLOORING EXPERIENCE

PARQUET

PARQUET

PARQUET



Wood Flooring Story	p. 4
From Nature to Your Home	p. 5
Tarkett Wood Flooring	p. 6
- a Natural Choice	p. 6
Tarkett Wood Flooring Guide	p. 8
Tarkett Ultimate Surface Protection	p. 10
Our Wood Species	p. 14
Tarkett Wood Ranges	p. 16
Performance Fashion	p. 18
Tango Vintage	p. 20
Tango Art	p. 22
Tango	p. 24
Rumba	p. 26
Salsa Art Vision	p. 28
Salsa Art	p. 30
Salsa Premium	p. 32
Salsa	p. 34
Bolero	p. 36
Samba	p. 38
Perfect Pair Fairytale	p. 41
Collection Overview	p. 52
Accessories	p. 56
Installation Guide	p. 58
Installation Options	p. 62
Accessories Installation	p. 65
Care and Maintenance	p. 66
Frequently Asked Questions	p. 68
Installer's Tips and Advice	p. 70



WOOD FLOORING STORY

FROM NATURE TO YOUR HOME

Tradition and innovation

All the knowledge and craftsmanship that the company has possessed since it was founded is expressed in the floors Tarkett produces today. Genuine expertise combined with cutting-edge technology results in new, modern, intelligent and beautiful wood flooring. All in service of finding the best wood flooring solutions that are inspired by nature, long lasting and easy to care for.



Warranty

Our products and limited warranties allow you to choose wood flooring that is right for you, your lifestyle, and your budget. While a quality product and warranty are extremely important, adequate installation and maintenance of your new Tarkett wood flooring is also crucial to ensure years of enjoyment. Performance, Fashion, Tango, Vintage, Tango Art, Tango Salsa Art, Vision, Salsa Art, Salsa Premium, Salsa and Rumba collections have a 30 years warranty. Samba and Bolero collections have a 20 years warranty.



Quality inspired by nature

Tarkett supports initiative to communicate the benefits of real wood flooring by promoting the Real Wood label. Products with the Real Wood label are natural wood products that can be re-sanded and renovated several times giving your floor a brand new look each time.



Enjoy immediately

A simple installation process and a T-lock locking system make fitting boards together even quicker and easier. This smart solution from Tarkett locks the boards closely together without edges and unevenness. You can use your new floor instantly.



Perfect finish

Complimentary accessories range that matches your wood flooring is also available to add the finishing touch. A variety of decorative finishes allows you to design wood flooring to your own individual needs to give rooms that special edge and help you complete the new look.





Eco Friendly

Tarkett is strongly committed to the environmental responsibility throughout all processes – from purchasing and using certified forest resources to producing and delivering eco-friendly products to the end consumers. Tarkett is devoted to promoting environmental excellence which can be trusted.





Every tree gives a variety of different colors and structures which vary depending on how we cut the material. Our 125-year-old experience in processing wood developed a unique system for carefully inspecting and grading wood. manufacturing floors with different looks, expressions and styles. This way, natural beauty becomes an everyday inspiration and part of your beautiful home.

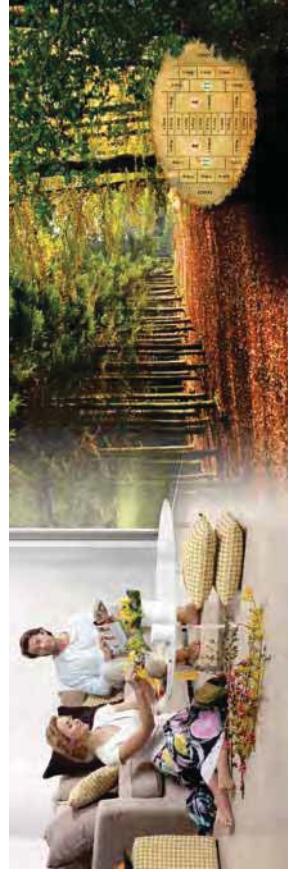

Available in 9 designs of TANGO ART collection:

board dimensions: 2215 x 164 x 14 mm



Available wood species: Oak, Ash.



Available in 10 designs of RUMBA collection:

board dimensions: 1200 x 120 x 14 mm

Available wood species: Oak, Ash.



Available in 28 designs of SALSA collection:

board dimensions: 2283 x 194 x 14 mm

Available wood species: Red Oak, Ash, Merbau, African Mahogany, Beech, Kempas, Walnut, Oak.



Available in 1-strip mini plank



Rumba collection

Available in 3-strip




Salsa Art collection

TARKETT WOOD FLOORING A NATURAL CHOICE




Social/Community Responsibility

Our floors provide safe, healthy environments where people can work, learn, play, heal and enjoy their leisure activities. Tarkett cares about people. Therefore, we organize a lot of activities that are devoted to Tarkett. Fond functioning. With our wood flooring, people can enjoy everyday life so we can be sure that Tarkett brings happiness to every home.

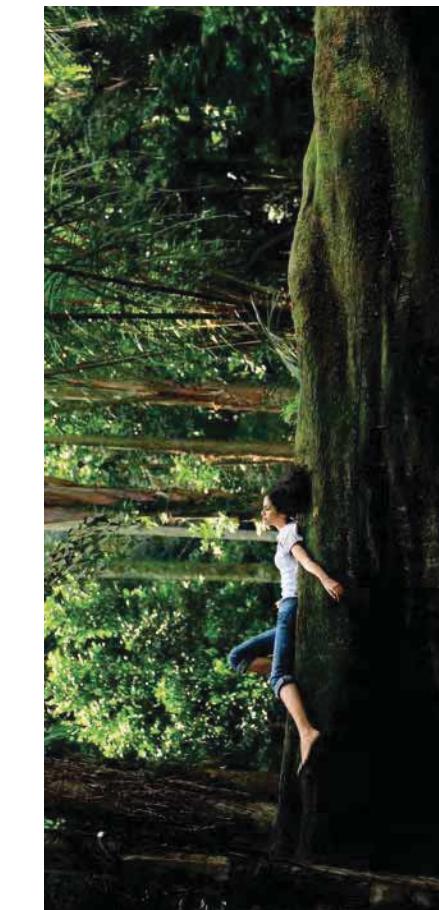

Wood is a wonderful, natural material which humans have used and trusted since the prehistoric times. Wood lives, breathes, and is unmistakable in its characteristics. When we are looking for something special, personal and authentic, natural wood can play a leading role. In its variety and liveliness, its scent, color and warm surface, wood provides a festival for the senses. Its variety is home to an enormous breadth of colors and shapes; its structure and irregularities are part of this and make wood especially beautiful when worked right. In this way, the aura of natural wood lends a comfortable and warm ambience to every home.

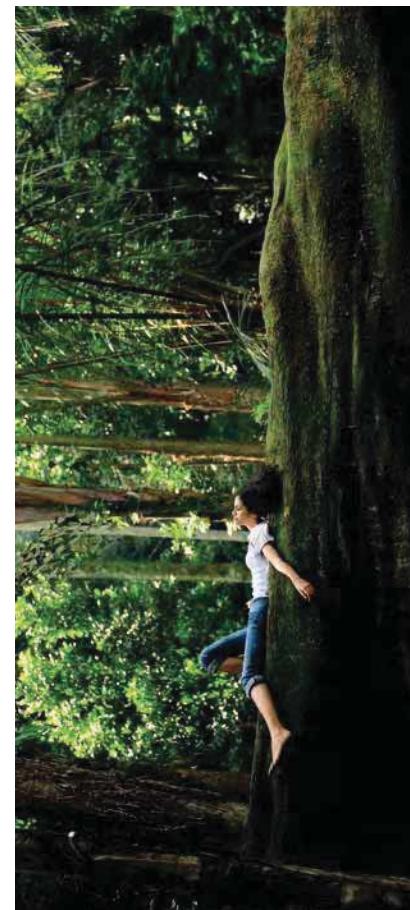

Eco-friendly wood flooring

We must produce environmentally friendly wood flooring products for our efforts to be meaningful to consumers. With Tarkett, you can be assured that you are getting the finest wood flooring covering available. Being sustainable is an everyday practice, not just an idea.




Recycling

We use more recycled content at the start of a product's life and recycle as much as possible at its end. We have the largest recycling operation in the industry and in 2008 we diverted over 88,000 tons of flooring from landfills to recycling. When it comes to recycling, being more responsible is a philosophy that we are following and not just an idea.



Energy

Energy use is a primary environmental concern in modern world as well as a significant financial issue. Tarkett has developed a number of innovative energy-saving processes that reduce fuel and electricity use. What we take from nature, with your help, we give back to people who live there – we carefully affordest in order to preserve healthy future for all of us.



Water

Tarkett has always been a good steward of our communities' water supplies and those supplies have traditionally been plentiful. Recently, however, many areas in which we operate in the Southeast have experienced drought conditions that made this topic a more critical issue. We've found innovative ways to become great stewards.



Tarkett Eco world

By manufacturing floors from the most diverse and exotic wood species from around the world, we make it possible to improve the quality of life in the local communities. With ISO 9001, 14001 and 18001, we have put the environmental and safety concerns in the scope of our activities and provided sustainable production performance through the management system.


Real wood

The environmental benefits of choosing real wood are indisputable. Far less energy is consumed in timber production, processing and disposal than with any other construction material. And, after each wood harvest, the forests are replanted for the next generation.



TARKETT WOOD FLOORING GUIDE

- Not everybody comes into store knowing exactly what style of wood flooring he or she wants. There are some specifics that can eventually help you find the floor that's going to transform your home; for example, the color, texture or plank width. With Tarkett's large, unique variety of wood flooring be confident that no matter what you are searching for, your perfect floor will await in the end.
- Whether building a new home or tackling a remodeling project, you can be confident that Tarkett genuine wood flooring will add significantly to the beauty, quality and value of your home. It's a smart investment that you will be able to enjoy for a lifetime.

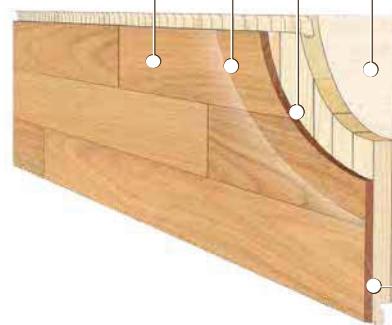

MULTILAYER PARQUET CONSTRUCTION

Tarkett's wood floorings are made from wood parts with more stable bonds. Special construction and bonding method give them superior durability and structural stability. These characteristics make them appropriate for installation in every available room including basements.

Surface protection - Tarkett's hard wearing high gloss, shiny or matt lacquer (Proteco Strong) or Proteco Strong Hardwax Oil.

Top layer - made of hard wood in a variety of species and designs including staining and heat treatment.

Middle layer - strong and supportive middle layer of transverse wood with fibers that contributes to the stability of the boards.

Balancing layer - this layer stabilizes the board and guarantees dimensional stability.


A STATE OF ART WOOD DRYING PROCESS

When producing wood flooring, one of the most important processes to get first quality flooring is the drying process.

- Tarkett has the longest experience of drying wood.
- Tarkett utilizes the most modern techniques available, like vacuum dryers, for drying wood.

A State of Art process in drying wood ensures an excellent stability in different relative humidity conditions. Our wood flooring is suitable for applications from very dry conditions in the very north of Europe down to more humid conditions in south.

The European norm EN 13469 defines the criteria that must be fulfilled for a floor to be classified as "Multilayer parquet".



CHOOSE COLOR - FOR THE BEST ATMOSPHERE AND MOOD

- Many available colors are the result of the natural color and graining of the wood species and the stain applied to the wood. Your home's lighting will also play a role, so ask the retailer for samples and compare the wood color with the overall decor of your home.
- Wood species differ in appearance, durability and hardness. Traditional Oak species are famous for their hardness and durability, variations in grain and shade that add character. There are many exotic species available - Kempas, Jatoba, African Mahogany - that take their distinctiveness from a combination of origin, color and surface characteristics. The hardness of wood is measured by the Brinell test - an industry standard test that reflects the surface's tolerance to pressure. The higher the score on the scale, the harder the floor.

FINEST CHARACTERISTICS AND SPECIFIC STYLES

- Wood species differ in appearance, durability and hardness. Traditional Oak species are famous for their hardness and durability, variations in grain and shade that add character. There are many exotic species available - Kempas, Jatoba, African Mahogany - that take their distinctiveness from a combination of origin, color and surface characteristics. The hardness of wood is measured by the Brinell test - an industry standard test that reflects the surface's tolerance to pressure. The higher the score on the scale, the harder the floor.

IMPRESSION WHICH SUITS THE TASTE AND PURPOSE

- Wood flooring is commonly described by boards' top layer, as strips and planks. The width of individual boards will have a dramatic influence on the final look of the floor. Select the look you like best - Salsa, Salsa Art and Salsa Art Vision (3-strip); 2283x194x14 mm; Samba and Bolero (3-strip); 1123x194x14 mm; Tango, Tango Art and Performance Fashion (1-strip); 2215x164x14 mm; Tango Vintage (1-strip); 2215x164x14 mm or Rumba (1-strip mini plank); 1200x120x14 mm.

STYLISH DETAILS THAT GIVE THE SPECIAL LOOK

- Wood flooring is commonly described by boards' top layer, as strips and planks. The width of individual boards will have a dramatic influence on the final look of the floor. Select the look you like best - Salsa, Salsa Art and Salsa Art Vision (3-strip); 2283x194x14 mm; Samba and Bolero (3-strip); 1123x194x14 mm; Tango, Tango Art and Performance Fashion (1-strip); 2215x164x14 mm; Tango Vintage (1-strip); 2215x164x14 mm or Rumba (1-strip mini plank); 1200x120x14 mm.

GLOSS FOR EVERY TASTE

- Your choice of high gloss or low gloss is a matter of personal preference. Whether you opt for matt, shiny or high gloss surface, you can be sure to have bought the most wear-resistant finish with the best micro scratch resistance on the market. Thanks to the properties of Proteco Strong, stains and marks are easy to remove and your floor will look fresh for a very long time. Proteco Hardwax Oil gives the best surface protection using oil thanks to the Hardwax component that stays on the surface improving wear and micro scratch resistance. By adding hard wax to the oil, a protective surface is achieved, which provides better protection against wear in the surface layer.

MAGNIFICENT WOOD IN MANY DIFFERENT WAYS

- Whether your taste is rustic, traditional or contemporary, we offer a wide variety of styles and surface textures to meet your needs. Before making your final selection, explore - from smooth and plain to rustic and brushed surface.

SURFACE EFFECTS

- We have selected top quality natural resources and the most advanced production techniques in order to produce the unique wood flooring with exquisite surface effects such as hand scrape, saw mark and distress.

AQUA GUARD PROTECTION

- Tarkett developed special hydrophobic liquid and State of Art applying equipment to protect the most sensitive part of installed wood flooring - short connections between boards. Hydrophobic liquid extends short side boards protection from most common water based liquid spills (water, tea, milk, coffee, wine, jutes).



Digital print technology
By using specially developed equipment for digital printing on real wood, Tarkett enhances natural wood beauty with unique and modern designs. Thanks to the innovative color application method and possibilities of changing colors and finishes combined with the individual grain of each board, Tarkett proudly offers a wide variety of exceptional wood flooring designs. With digital printing technology, over 125 years old tradition of creating quality wood flooring and the most modern production technology are being brought together. Tarkett sets a whole new trend in decorating interiors, where wood flooring becomes part of your image and provides true, Tarkett's wood flooring has never been so perfect.

SUPERIOR QUALITY AND LASTING BEAUTY

Why are Tarkett multilayer wood floors better than my solid floors?

- Extremely easy and fast floor installation
- Perfect look without gaps between boards
- Our wood floors are already treated with resistible UV lacquer which contains no harmful materials
- Following customer's needs, our floors can be re-sanded and lacquered several times during their use
- Superior wood floor quality has a unique 30 years warranty

GRADING OF WOOD

- A tree is like a secret package. You have some ideas of the content, but you don't know for sure what will show up. Each and single wood piece is unique.
- In our manufacturing, the wood is sorted and graded in different families to get specific image of the flooring. At Tarkett, we offer different wood grading:

- Select - very soft and smooth.
Premium - uniform wood with minor variations.

Nature - the traditional grading.

Rustic - lively with knots.

Robust - lively with less knots but more color variations.

- Our century long experience, commitment to excellence and care for consumers guide us in eliminating natural wood imperfections - knot holes, bird pecks, worm holes, black spots and other cracks.

A State of Art process in drying wood ensures an excellent stability in different relative humidity conditions. Our wood flooring is suitable for applications from very dry conditions in the very north of Europe down to more humid conditions in south.

THE ULTIMATE SURFACE PROTECTION




Safe, Resistant, Reliable wood flooring. With its superb craftsmanship, exceptional quality and innovative design, Tarkett wood flooring will enrich your living space and ensure long life expectation.

- Aqua Guard test is used to determine the lacquer condition and flooring visual aspect 3h after spilling water on the short side of board connection.
- Bacteria test is used to measure the number of bacteria cells 24h after incubation on the treated wood flooring sample.
- Impact test measures the highest point from which a steel ball will be thrown without creating lacquer cracks on the edge of impressed spot.
- Taber test represents one of the most important tests in wood flooring industry and it simulates lacquer wear and tear during the time of usage.
- Micro scratch test uses abrasive sponge and measures gloss differences in number of passes over the predefined lacquered surface area.

The Ultimate Surface Protection refers to: Performance Fashion, Tango, Tango Art, Tango Vintage, Rumba, Salsa Art Vision, Salsa Art and Salsa collection.




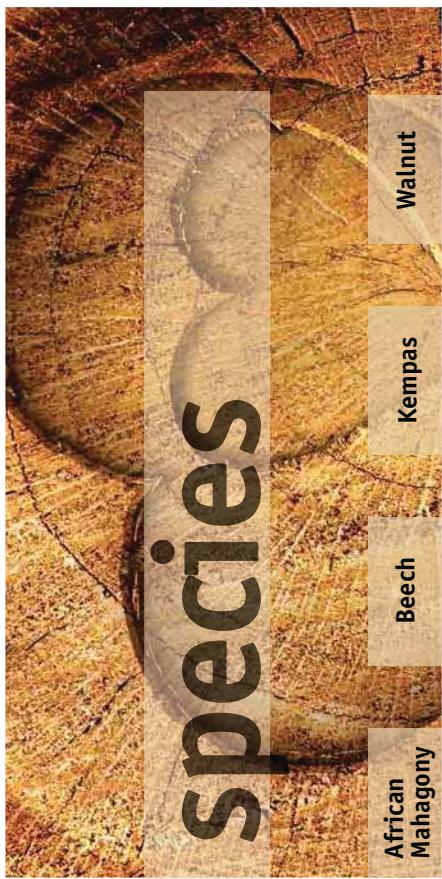

our wood

African Mahagony	Beech	Kempas	Walnut

Kempas (Koompassia malaccensis)	Beech (Fagus sylvatica)	Walnut (Genus Juglans)	Eternal energy

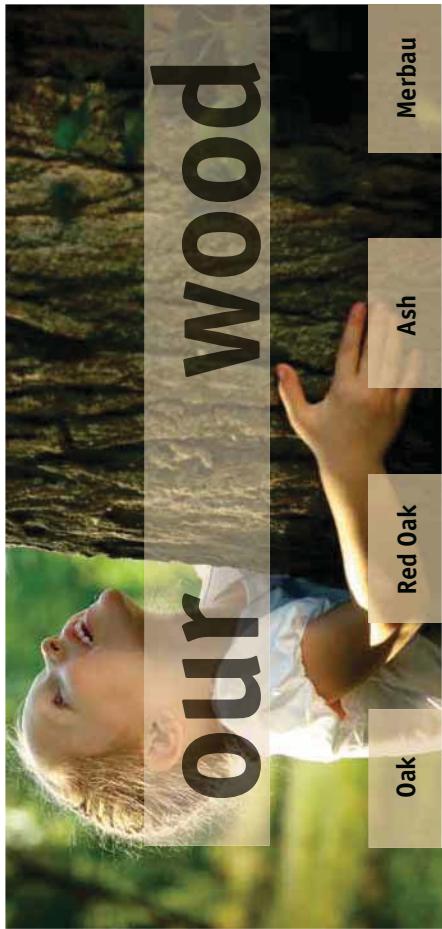

Merbau	Ash	Mahogany (Sapele)	Shining elegance

Red Oak	Oak	For a friendly atmosphere	Luxurious touch

Red Oak (Quercus rubra)	Oak	Interesting moments	Lasting beauty

TARKETT WOOD RANGES




Crafted designed wood floors using the best materials available for homes, shops, hotels, restaurants and offices

SENSORIAL BENEFITS

- Exclusive oak planks from special selections of wood
- Natural wood designs enhanced by crafted elements
- Exclusive extra wide planks for luxury applications
- A range built on emotions for the natural feeling of real wood
- Extensive range of accessories to support installation, care & maintenance and accessories like smart skirting boards, moldings and pipe covers in different wood species to complete the final touch of wood flooring

ENVIRONMENTAL BENEFITS

- Very stable multi-layer construction that minimizes movement in changing indoor humidity conditions
- Proteco – one of the strongest surface protections available – provided in Matt Lacquer and in Hardwax Oil
- Suitable for self-regulating under floor heating systems (max 25 °C)
- Easy to care & maintain without using aggressive detergents
- High durability, good acoustics, excellent thermal stability and long life expectancy.
- Very low VOC emission values for good indoor air quality
- Suitable for self-regulating under floor heating systems (max 25 °C)
- Easy to care & maintain without using aggressive detergents

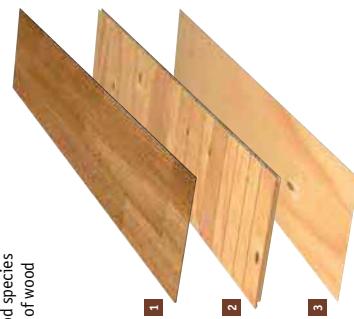

MULTILAYER WOOD
SOLUTIONS

TECHNICAL DATA	STANDARDS	Performance Fashion	Tango Vintage	Tango Art	Tango	Rumba
Characteristics						
Total thickness	ISO 24346 (EN 428)		194 mm	164 mm	164 mm	14 mm
Width	-	164 mm				120 mm
Length	-	2215 mm	2283 mm	2215 mm	2215 mm	1200 mm
Wear layer thickness	-	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm
Weight	-	app. 7,2±0%	app. 7,3±0%	app. 7,3±0%	app. 7,3±0%	app. 7,4±0%
Boards in 1 Pack	-	6	6	6	6	6
Sqm 1 Pack	-	2,18	2,18	2,18	2,18	0,864

TECHNICAL DATA	STANDARDS	Salsa Art Fashion	Salsa Art	Salsa Premium	Salsa	Bolero	Samba
Characteristics							
Total thickness	ISO 24346 (EN 428)		194 mm	194 mm	194 mm	194 mm	194 mm
Width	-	194 mm					194 mm
Length	-	2283 mm	2283 mm	2283 mm	2283 mm	1123 mm	1123 mm
Wear layer thickness	-	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm	app. 3,6 mm
Weight	-	app. 7,3±0%	app. 7,3±0%	app. 7,3±0%	app. 7,3±0%	app. 7,3±0%	app. 7,3±0%
Boards in 1 Pack	-	6	6	6	6	6	6
Sqm 1 Pack	-	2,658	2,658	2,658	2,658	1,307	1,307



General Information



PERFORMANCE FASHION

PERFORMANCE FASHION



Vivienne New Look

For ages the world was flat and confined, bounded by strict lines and tied by obligatory laws. And only fashion is able to tint the dull daily routine of our ambience, shifting its shapes, colors and moods. Mix of styles has become a new trend. Infinite possibilities of digital images stepped out of the paper plane and a classic wood floor was enhanced by millions of undertones and designs. Everything for You, to find that very pattern which will ideally reflects your aspiration.

Digital Print on a wood boards – best of nature and technologies, embodied in the interior of Your dream. Performance series is a dedication to the most talented and extraordinary personalities. Incredible, creative, inspiring. Exceptional. To those who create, whose style is copied by followers, whose world vision becomes a trend. Performance by Tarkett exhibits the incredible technologies from a world leader, a mix of high-precision digital printing with a warm natural structure of noble wood. These are the designs that will reveal your "creative ideas in a brand new dimension".

TECHNICAL DATA		STANDARDS		Performance Fashion	
Characteristics				Surface Treatment	
Total thickness	15024346 (EN 428)	-	-	14 mm	
Width	-	-	-	164 mm	
Length	-	-	-	2215 mm	
Wear layer thickness	-	-	-	app. 3,6 mm	

Logistics Information		
dimensions (mm)	154x2215 mm	m ² /box
locking system	T-Lock	m ² /pallet
planks/box	6	130,8



Warranty




General Information




Download the product offer

19

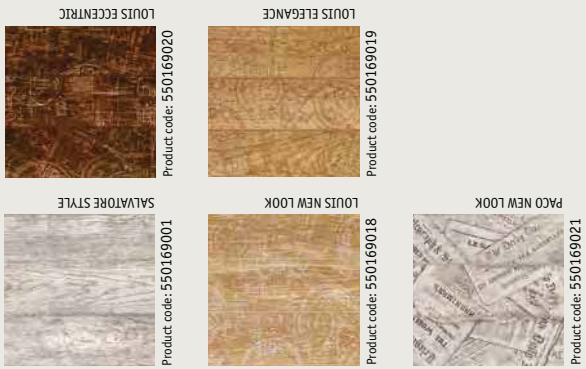

See page 54 for coordinated accessories offer

18

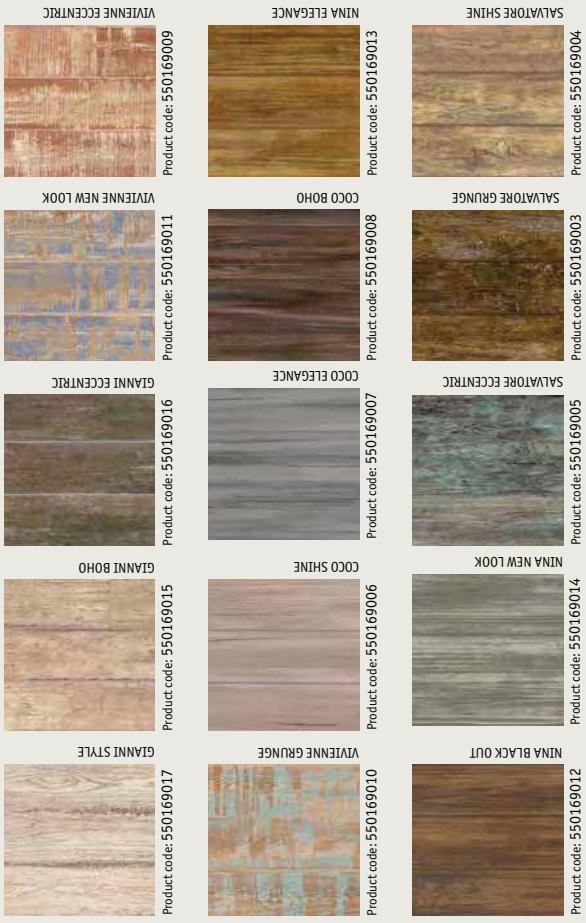


Product code: 550169021
Product code: 550169019
Product code: 550169018
Product code: 550169020
Product code: 550169017
Product code: 550169016
Product code: 550169015
Product code: 550169014
Product code: 550169013
Product code: 550169012
Product code: 550169011
Product code: 550169009
Product code: 550169008
Product code: 550169007
Product code: 550169006
Product code: 550169005
Product code: 550169004
Product code: 550169003
Product code: 550169002
Product code: 550169001

19

TANGO VINTAGE

TANGO VINTAGE

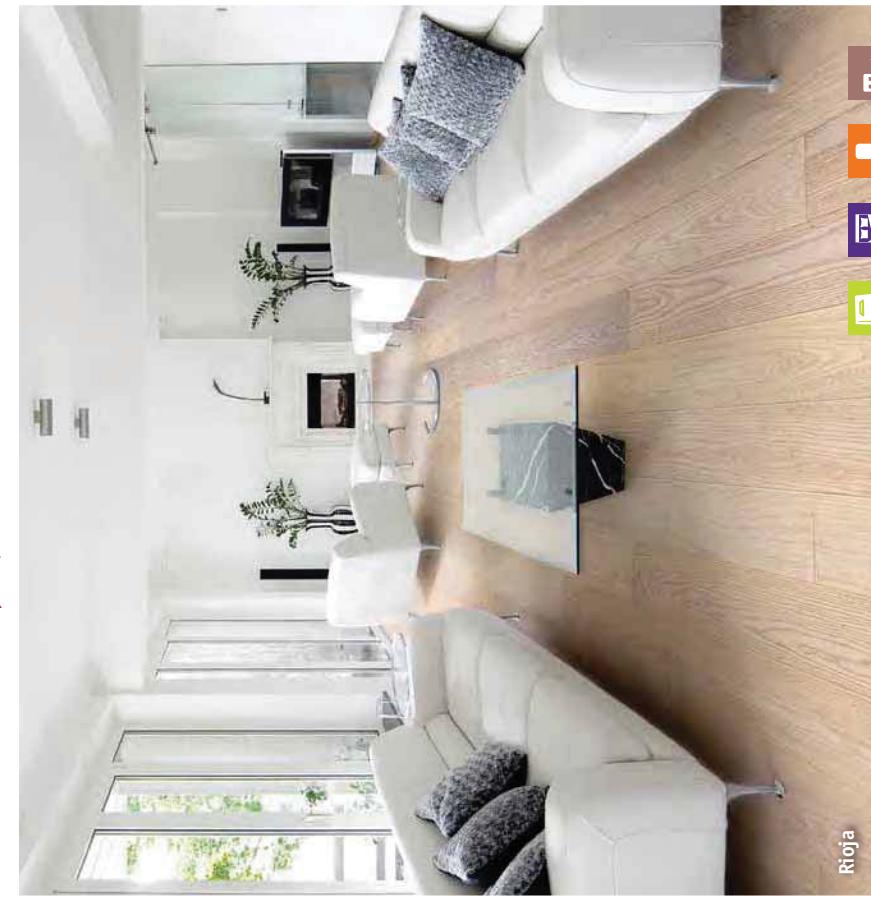

Characteristics

Tango Vintage is oiled wood flooring which gives you a wide range of unique designs and special effects. Each design of this collection is one of a kind piece of beauty, but also a mix of tradition built for centuries and contemporary colors and textures. Remarkably versatile and inevitably high quality Tango Vintage oiled wood flooring is a smart investment that you will enjoy for a lifetime. Hardwearing, easy to clean, and scratch resistant, over the years the appearance will develop a unique look that reflects your life style.


Surface Treatment



TECHNICAL DATA	STANDARDS	Tango Vintage
Characteristics		
Total thickness	ISO 24346 (EN 4/28)	14 mm
Width	-	194 mm
Length	-	2283 mm
Wear layer thickness	-	app.3,6 mm

Logistics Information

dimensions (mm)	194x2283 mm	m ² /box	2.18
locking system	T-Lock	m ³ /pallet	130.8
plants/box	6		



Warranty



General Information



Manufactured by:
Takett d.o.o.
Industrijska zona 14
21000 Bečka Palanka
SRBIJA




Download the product offer



Product code: 550129004



Product code: 550129008



Product code: 550129005



Product code: 550129001



Product code: 550129002



Product code: 550129003




Product code: 550129007



Product code: 550129006

TANGO ART

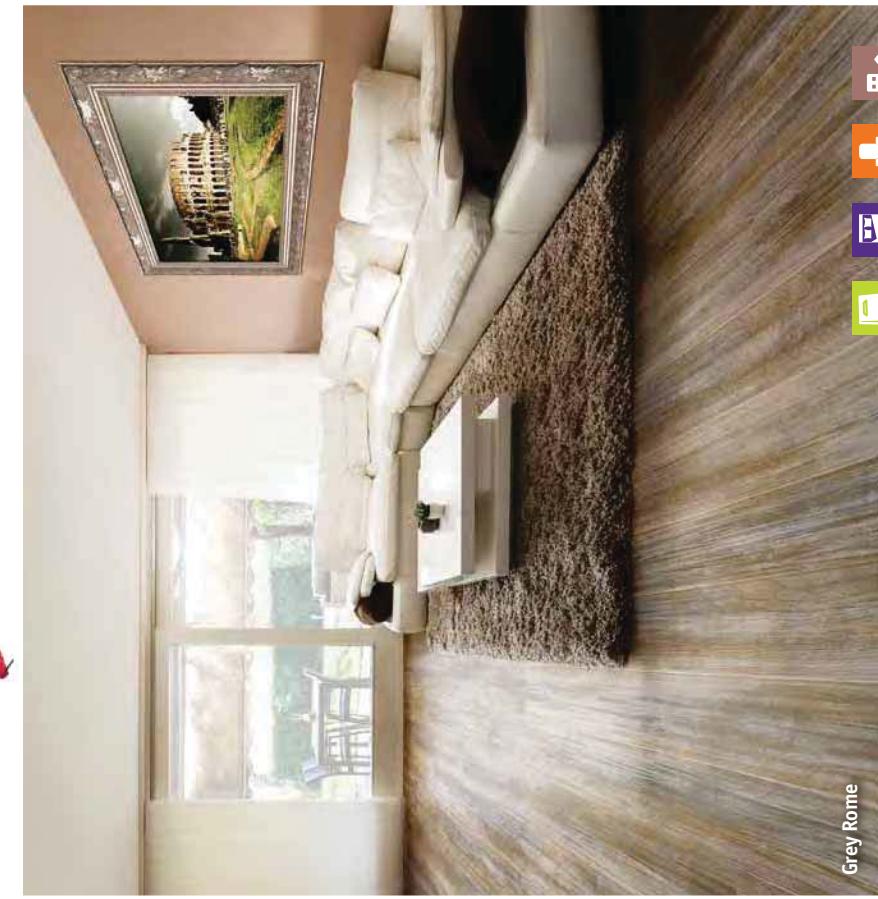

Grey Rome

VIOLET TOKYO

Product code: 550059005

PEARL DUBAI

Product code: 550059001

GOLDEN SYDNEY

Product code: 550059009

CREAM NEW YORK

Product code: 550059003

WHITE MOSCOW

Product code: 550059008

BROWN BARCELONA

Product code: 550059002

AMBER JOHANNESBURG

Product code: 550059012

GREY ROME

Product code: 550059010

WHITE OSLO

Product code: 550059011

TANGO ART

Tango Art collection provides you with unique designs that bring emotions from journeys through beautiful cities all over the world. Using the inspiration that we took from nature, we created the artistic and rich designs from Tango Art. Feel the rhythm of dancing.


TECHNICAL DATA	STANDARDS	Tango ART
Characteristics		
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	164 mm
Length	-	2215 mm
Wear layer thickness	-	app. 3.6 mm

Surface Treatment



Logistics Information

dimensions (mm)	164x2215 mm	m ² /box	2.18
locking system	T-Lock	m ² /pallet	130.8
packs/box	6		



Warranty

General Information



See page 54 for coordinated accessories offer



Download the product offer



TANGO

Tango collection brings you the finest one-piece wood planks found in nature, designed and crafted exclusively for you. Tasteful edge details and rich texture will guide you to delightful flights of fancy, discovering a whole new meaning of style.


TECHNICAL DATA	STANDARDS	Tango
Characteristics		
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	164 mm
Length	-	2215 mm
Wear layer thickness	-	app. 3,6 mm



Oak Cumin BR

Logistics Information

dimensions (mm)	164x2215 mm	m ² /box	2.18
locking system	T-Lock	m ² /pallet	130,8
plants/box	6		



Warranty



General Information




AK SCHWARZWALD

Product code: 5500058029



[Download the product offer](#)

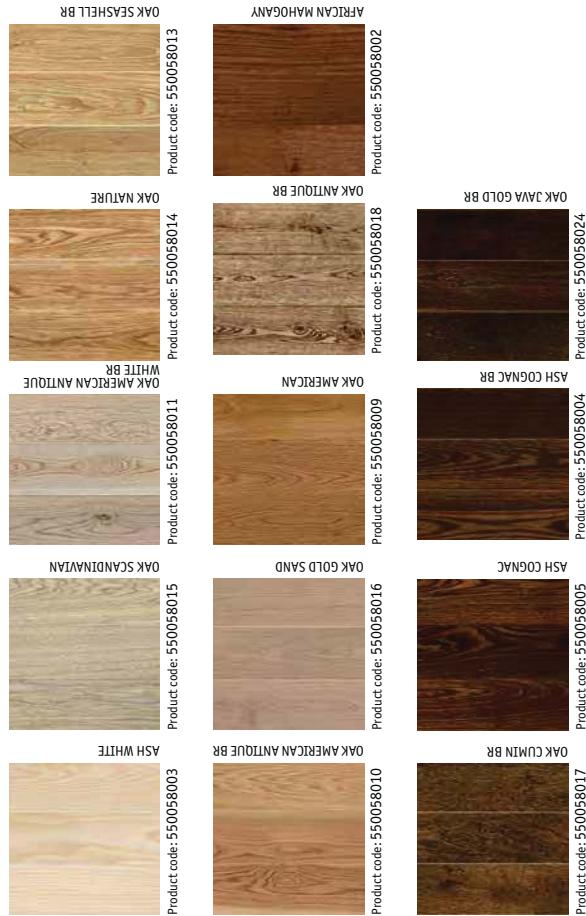

24

RUMBA

RUMBA

With our Rumba collection, every customer can create a modern and stylish living space. Don't forget – dancing was never as easy as now – so sail into Rumba space with beautiful wood flooring!

TECHNICAL DATA	STANDARDS	Rumba
Characteristics		
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	120 mm
Length	-	1200 mm
Wear layer thickness	-	app. 3,6 mm

Surface Treatment






Logistics Information

dimensions (mm)	120x1200 mm	m ² /box	0,864
locking system	T-Lock	m ² /pallet	60,48
planks/box	6		

Warranty




General Information



OAK MONSOON
Product code: 550048010



OAK SAVANA
Product code: 550048005



ASH STONE
Product code: 550048001



OAK SAND
Product code: 550048007



OAK CANYON
Product code: 550048006



OAK FOREST
Product code: 550048008



OAK LAVA
Product code: 550048004



Download the product offer

SALSA ART VISION

NEW

SALSA ART VISION

This collection is designed for people of sophisticated taste for decorating interiors, highlighting their creativity. Natural beauty of these wood flooring designs, combined with their individual character, will give your home a balanced feel. Unconventional beauty of these designs will enable you to play with colors and shades by paying attention to every detail. From white and beige, through different nuances of brown, to unique blue, green and violet color, this collection has something to offer to any type of interior. Due to individual grain of wood, every board is unique and Proteco Strong lacquer ensures the strongest surface protection on the market.


TECHNICAL DATA	STANDARDS	Salsa Art Vision
Characteristics		
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	2283 mm
Wear layer thickness	-	app. 3.6 mm

Surface Treatment



Logistics Information

dimensions (mm)	194x2283 mm	m ² /box	2.658
locking system	T-Lock	m ² /pallet	132.9
planks/box	6		



Warranty





General Information



Download the product offer



White Lightning

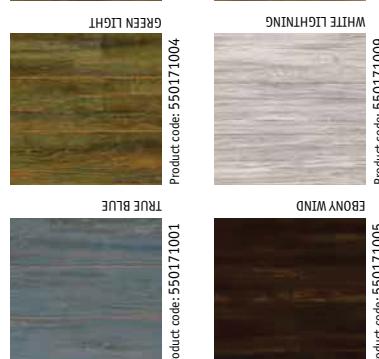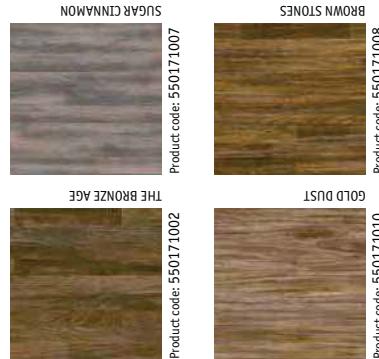

SALSA ART



Purple Rain

Product code: 550050015	WHITE PEARL	Product code: 550050017	PURPLE RAIN
Product code: 550050016	CREAM RHAPSODY	Product code: 550050018	BLACK OR WHITE
Product code: 550050020	VANILLA CLOUDS	Product code: 550050019	SILVER STAR
Product code: 550050021	WHITE WEDDING	Product code: 550050014	TOUCH OF GREY
Product code: 550050022	WHITE CANVAS	Product code: 550050023	BEIGE SUNSHINE
Product code: 550050024	SHADES OF GREY	Product code: 550050025	PROTECO

Product code: 550050013	SHINING STAR	Product code: 550050018	BLACK OR WHITE
Product code: 550050015	WHITE WEDDING	Product code: 550050017	PURPLE RAIN
Product code: 550050020	VANILLA CLOUDS	Product code: 550050019	SILVER STAR
Product code: 550050021	WHITE PEARL	Product code: 550050014	TOUCH OF GREY
Product code: 550050022	WHITE CANVAS	Product code: 550050023	BEIGE SUNSHINE
Product code: 550050024	SHADES OF GREY	Product code: 550050025	PROTECO

Product code: 550050025	PROTECO	Product code: 550050024	SHADES OF GREY
Product code: 550050023	BEIGE SUNSHINE	Product code: 550050025	PROTECO

SALSA ART

Artisan Salsa Art collection combines wood with the latest advances in imaging, texturing and finishing to redefine the meaning of natural art and create the most authentic wood flooring. Choose between various design nuances. Let your dreams come true.

Surface Treatment



TECHNICAL DATA	STANDARDS	Salsa ART
Characteristics		
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	2283 mm
Wear layer thickness	-	app. 3.6 mm

Logistics Information

dimensions (mm)	m ² /box	2.658
locking system	T-Lock	m ² /pallet
planks/box	6	132.9



3-strip

Warranty



General Information

	Manufactured by: Tarkett d.o.o. Industrijska cesta 14 21000 Bečka Palanka SERBIA
--	--



Download the product offer

SALSA PREMIUM

Designed for Premium Taste.
To be at a premium level means not to be common and therefore to have greater value than others of its kind. Just as gemstones are polished to enhance their color and clarity, which results in precious jewelry all Salsa Premium designs are produced with great attention and devotion. The natural beauty of these designs, with emphasized wood grain and warm colors, will bring peaceful atmosphere to both modern and classic interiors. Surface protection and durability are ensured by Proteco Hardwax oil which offers better protection than traditional oils thanks to the Hardwax component.

TECHNICAL DATA	STANDARDS	Salsa Premium
Characteristics		
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	2283 mm
Wear layer thickness	-	app. 3.6 mm

Surface Treatment



Logistics Information

dimensions (mm)	194x2283 mm	m ² /box	2.658
locking system	T-Lock	m ² /pallet	132.9
planks/box	6		
		3-strip	

Warranty




General Information



Download the product offer

See page 54 for coordinated accessories offer

[33]

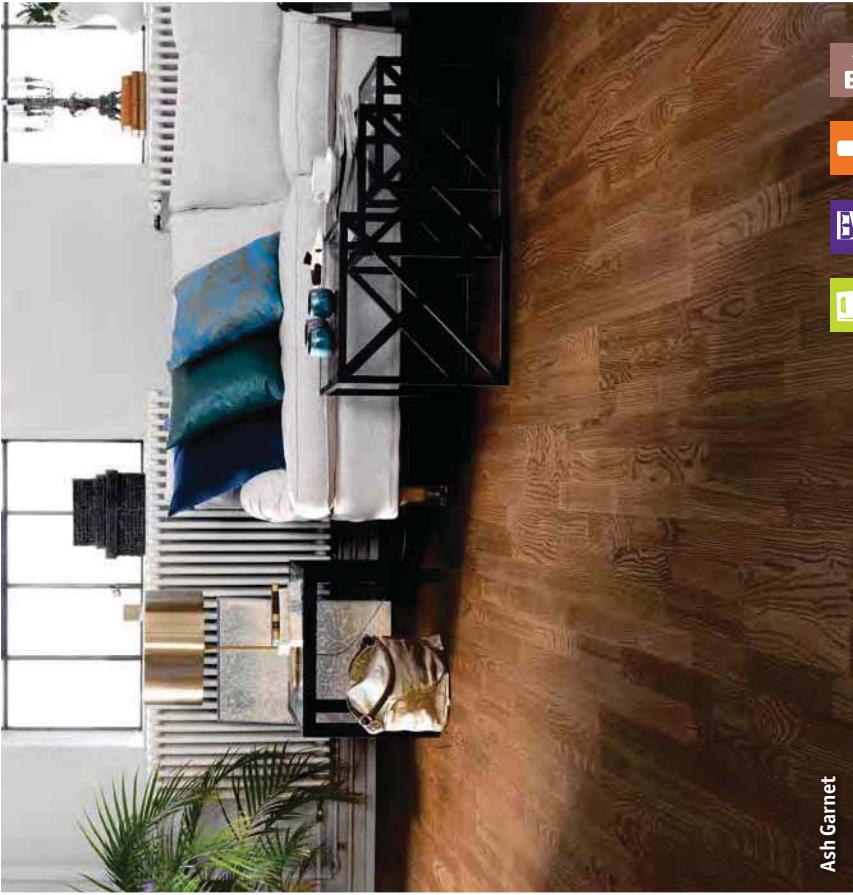

Ash Garnet



Ash Opal



Ash Quartz



Ash Jasper



Ash Garnet

Product code: 550170005



Oak Moonstone

Product code: 550170002



Oak Topaz

Product code: 550170006

[32]

SALSA




Salsa, the most diversified wood flooring collection, brings the power of nature to your living and working space. Wood species from all over the world, around 30 designs and various surface effects are designed to rediscover charms of emotions and secrets of life.

SALSA

TECHNICAL DATA	STANDARDS	Salsa
Characteristics		
Total thickness	ISO 24346 (EN 1428)	14 mm
Width	-	194 mm
Length	-	2233 mm
Wear layer thickness	-	app. 3,6 mm

Logistics Information

dimensions (mm)	143x2233 mm	m ² /box	2.658
locking system	T-Lock	m ² /pallet	132,90
planks/box	6		



Warranty



General Information

	Manufactured by: Takett d.o.o. Industrijska zona 14 21000 Baka Palanka SRBIJA



Product code: 550049067


Product code: 550049071

Product code: 550049078



Product code: 550049090

Product code: 550049077



Product code: 550049092



Product code: 550049093



Product code: 550049078



Product code: 550049081



Product code: 550049079



Product code: 550049057



Product code: 550049088



Product code: 550049075



Product code: 550049062



Product code: 550049072



Product code: 550049063



Product code: 550049060

Product code: 550049074

Product code: 550049070

Product code: 550049065

Product code: 550049064

Product code: 550049066



BOLERO

BOLERO

For cozy moments. Fill your home with natural colors from Bolero collection. The special charm and the modern touch will bring you cozy moments! Sail through various nuances and structures of Oak, Ash or Beech. And do not forget to enjoy the exciting details of your own space.


Surface Treatment



TECHNICAL DATA	STANDARDS	Bolero
Characteristics		
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	1123 mm
Wear layer thickness	-	app. 3,6 mm

Logistics Information

dimensions (mm)	194x1123 mm	m ² /box	1,307
locking system	T-Lock	m ² /pallet	65,35
planks/box	6		




3-strip

Warranty




General Information


	Manufactured by: Tarkett d.o.o. Industrijska zona 14 2140 Bečka Palanka Srbija
--	--

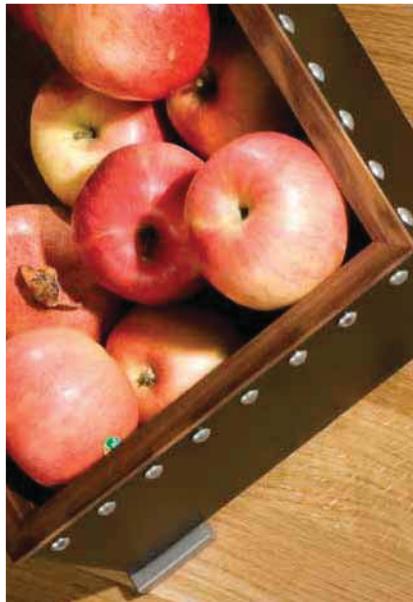

ASH CARMEL BR
Product code: 550035011



OAK EBONY
Product code: 550035019



OAK COPPER
Product code: 550035016



OAK NATURE BR
Product code: 550035017



ASH WINTER
Product code: 550035014



ASH COGNAC GREY BR
Product code: 550035012



Download the product offer

SAMBA

Samba, a bridge between tradition and the modern, with the most common wood species and design range, leaves no space for surprises. It's a simple solution for every taste. Beautiful wood designs display variety of natural lines combining it with durability and providing attractive interiors.

Surface Treatment



TECHNICAL DATA	STANDARDS	Samba
Characteristics		
Total thickness	ISO 24346 (EN 428)	14 mm
Width	-	194 mm
Length	-	1123 mm
Wear layer thickness	-	app. 3,6 mm




Logistics Information

dimensions (mm)	194x1123 mm	m ² /box	1,307
locking system	T-Lock	m ² /pallet	65,35
planks/box	6		

Warranty



General Information



Download the product offer




Oak Nature

See page 54 for coordinated accessories offer

[39]

PERFECT PAIR FAIRYTALE

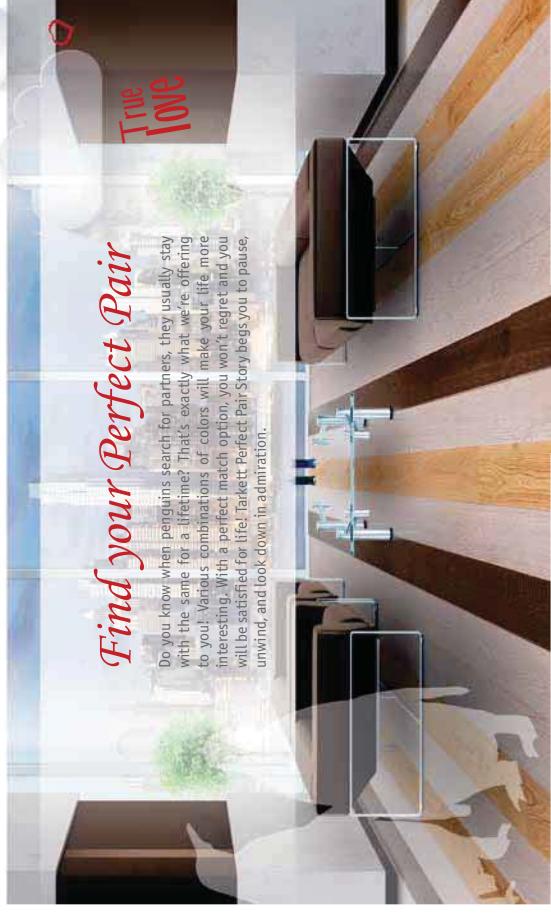

Find your Perfect Pair

Do you know when penguins search for partners, they usually stay with the same for a lifetime? That's exactly what we're offering to you! Various combinations of colors will make your life more interesting. With a perfect match option, you won't regret and you will be satisfied for life. Tarkett Perfect Pair Story begs you to pause, unwind, and look down in admiration.


Glamorous...

A glamorous feeling when you find your ideal combination...

Divine...

Love is truly divine when opposites attract.

PARQUET

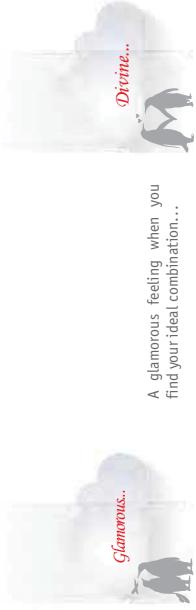

Natural...

Silent power and beauty of the natural is an entrance fee for life balance...



Elegant...

*

Vintage look is a piece of classic beauty and elegance.




See page 54 for coordinated accessories offer

[41]

[40]

PERFORMANCE FASHION COLLECTION

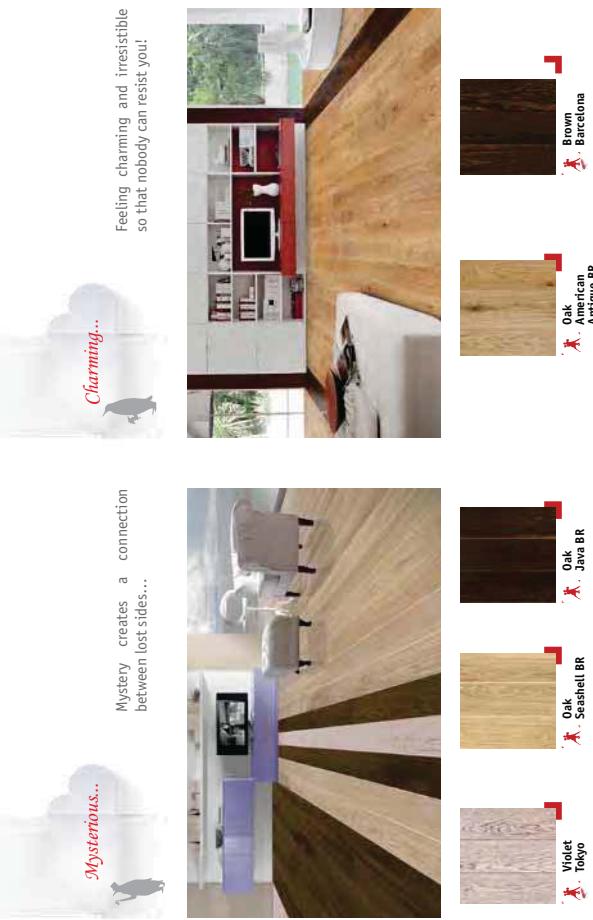

Product name and product code:	Which Performance Fashion is best for you?	Color variation over time:	Color scale:	Hardness test:	Digital print:	Brushed:	Bevel:	Finishing:
Gianni Style 550169017		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Gianni Boho 550169015		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Gianni Eccentric 550169016		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Vivienne New Look 550169011		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Vivienne Eccentric 550169009		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Vivienne Grunge 550169010		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Coco Shine 550169006		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Coco Elegance 550169007		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Nina Elegance 550169013		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Nina Black Out 550169012		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Nina New Look 550169014		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Salvatore Eccentric 550169005		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Salvatore Grunge 550169003		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny
Salvatore Shine 550169004		least → most	softest → hardest	softest → hardest	pro te Shiny	pro te Shiny	pro te Shiny	pro te Shiny

In the end, there is only one thing we didn't tell you - the Perfect Pair concept represents wood in all its glory! This means not just simply matching two or three various designs, but also carefully combining wood flooring designs, skirting, furniture and wall colors! So, the only thing you can do is actually very easy - enjoy the beauty we prepared specially for you!



PERFORMANCE FASHION COLLECTION

Product name and product code:	Which Performance Fashion is best for you?	Color variation scale: over time:	Hardness test:	Digital print:	Brushed:	Bevel:	Finishing:
Salvatore Style 550169001		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Louis Eccentric 550169020		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Louis New Look 550169018		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Louis Elegance 550169019		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Paco New Look 550169021		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny

TANGO ART COLLECTION

Product name and product code:	Which Tango Art is best for you?	Color variation scale: over time:	Hardness test:	Digital variation:	Brushed:	Bevel:	Finishing:
White Moscow 55059008		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Violet Tokyo 55059005		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Pearl Dubai 55059001		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Cream New York 55059003		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Golden Sydney 55059009		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Brown Barcelona 55059002		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
White Oslo 55059011		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Grey Rome 55059010		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny
Amber Johannesburg 55059012		+ least most	softer harder	softer harder	softer harder	softer harder	Shiny

TANGO VINTAGE COLLECTION

Product name and product code:	Which Tango Vintage is best for you?	Color variation scale: over time:	Hardness test:	Special surface effects:	Oil type/ Brushed:	Bevel:	Finishing:
Andalucía 550129002		+ least most	softer harder	COOLED	4 Series	SOFT BEVEL	Shiny
Roja 550129001		+ least most	softer harder	REFINED	4 Series	SOFT BEVEL	Shiny
Tuscany 550129005		+ least most	softer harder	REFINED	4 Series	SOFT BEVEL	Shiny
Provence 550129008		+ least most	softer harder	REFINED	4 Series	SOFT BEVEL	Shiny
Champagne 550129004		+ least most	softer harder	REFINED	4 Series	SOFT BEVEL	Shiny
Baden 550129006		+ least most	softer harder	REFINED	4 Series	SOFT BEVEL	Shiny
Porto 550129007		+ least most	softer harder	REFINED	4 Series	SOFT BEVEL	Shiny
Bordeaux 550129003		+ least most	softer harder	REFINED	4 Series	SOFT BEVEL	Shiny

TANGO COLLECTION

Product name and product code:	Which Tango is best for you?	Color variation over time: scale:	Hardness test:	Staining: Brushed	Bevel: Finishing	
Ash White 550058003		+ least least more most	softer harder			 High gloss
Oak Scandinavian 550058015		+ least least more most	softer harder			 High gloss
Oak American Antique White BR 550058011		+ least least more most	softer harder			 High gloss
Oak Nature 550058014		+ least least more most	softer harder			 High gloss
Oak Seashell BR 550058013		+ least least more most	softer harder			 High gloss
Oak American Antique BR 550058010		+ least least more most	softer harder			 High gloss
Oak Gold Sand 550058016		+ least least more most	softer harder			 High gloss
Oak American 550058009		+ least least more most	softer harder			 High gloss
Oak Antique BR 550058018		+ least least more most	softer harder			 High gloss
African Mahogany 550058002		+ least least more most	softer harder			 High gloss
Walnut American 550058026		+ least least more most	softer harder			 High gloss
Oak Currin BR 550058017		+ least least more most	softer harder			 High gloss
Ash Cognac 550058005		+ least least more most	softer harder			 High gloss
Ash Cognac BR 550058004		+ least least more most	softer harder			 High gloss
Oak Java Gold BR 550058024		+ least least more most	softer harder			 High gloss
Oak Schwarzwald 550058029		+ least least more most	softer harder			 High gloss

RUMBA COLLECTION

Product name and product code:	Which Rumba is best for you?	Color variation over time: scale:	Hardness test:	Staining: Brushed	Bevel: Finishing	
Oak Snow 550048009		+ least least more most	softer harder			 High gloss
Oak Canyon 550048006		+ least least more most	softer harder			 High gloss
Oak Sand 550048007		+ least least more most	softer harder			 High gloss
Ash Stone 550048001		+ least least more most	softer harder			 High gloss
Oak Savanna 550048005		+ least least more most	softer harder			 High gloss
Oak Lava 550048004		+ least least more most	softer harder			 High gloss
Oak Forest 550048008		+ least least more most	softer harder			 High gloss
Ash Cave 550048002		+ least least more most	softer harder			 High gloss
Oak Fjord 550048003		+ least least more most	softer harder			 High gloss
Oak Monsoon 550048010		+ least least more most	softer harder			 High gloss

SALSA ART VISION COLLECTION

Product name and product code:	Which Salsa Art Vision is best for you?	Color variation scale: over time: test:	Hardness test:	Digital print:	Brushed:	Bevel:	Finishing:	Product name and product code:	Which Salsa Art is best for you?	Color variation scale: over time: test:	Hardness test:	Staining: Bevel: Finishing:
Ivory Dreams 550171003								White Canvas 55050022				
True Blue 550171001								Beige Sunshine 55050023				
Green Light 550171004								Shades of Grey 55050024				
The Bronze Age 550171002								White Pearl 55050015				
Sugar Cinnamon 550171007								White Wedding 55050021				
Chocolate Sensation 550171006								Vanilla Clouds 55050020				
Ebony Wind 550171005								Silver Star 55050019				
White Lightning 550171009								Touch of Grey 55050014				
Cold Dust 550171010								Cream Rhapsody 55050016				
Brown Stones 550171008								Purple Rain 55050017				
Bright as Yellow 550171011								Shining Star 55050013				
Violet Hill 550171012								Black or White 55050018				

SALSA ART COLLECTION

Product name and product code:	Which Salsa Art Vision is best for you?	Color variation scale: over time: test:	Hardness test:	Digital print:	Brushed:	Bevel:	Finishing:	Product name and product code:	Which Salsa Art is best for you?	Color variation scale: over time: test:	Hardness test:	Staining: Bevel: Finishing:
White Canvas 55050022								White Canvas 55050022				
Beige Sunshine 55050023								Beige Sunshine 55050023				
Shades of Grey 55050024								Shades of Grey 55050024				
White Pearl 55050015								White Pearl 55050015				
White Wedding 55050021								White Wedding 55050021				
Vanilla Clouds 55050020								Vanilla Clouds 55050020				
Silver Star 55050019								Silver Star 55050019				
Touch of Grey 55050014								Touch of Grey 55050014				
Cream Rhapsody 55050016								Cream Rhapsody 55050016				
Purple Rain 55050017								Purple Rain 55050017				
Shining Star 55050013								Shining Star 55050013				
Black or White 55050018								Black or White 55050018				

SALSA PREMIUM COLLECTION

Product name and product code:	Which Salsa Premium is best for you?	Color variation over time: scale:	Color variation over time: scale:	Hardness test:	Oil type: Brushed:	Bevel:	Finishing:
Oak Moonstone 550170002		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Ash Opal 550170001		least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Ash Quartz 550170003		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Mat
Oak Jasper 550170004		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Ash Garnet 550170005		least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Topaz 550170006		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny

SALSA COLLECTION

Product name and product code:	Which Salsa is best for you?	Color variation over time: scale:	Color variation over time: scale:	Hardness test:	Staining: Brushed:	Bevel:	Finishing:
Ash Nature 550049061		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Ash Arctic 550049060		least	softer harder	softer	oil COLOURED	bevel	protec [®] Mat
Oak Nordic 550049072		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Mat
Oak Robust White 550049075		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Ivory BR 550049081		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Original HG 550049074		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Mat
Red Oak 550049083		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Sahara 550049073		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Ash Tramku 550049072		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Maroon 550049093		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Beech Premium 550049062		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny

SALSA COLLECTION

Product name and product code:	Which Salsa is best for you?	Color variation over time: scale:	Color variation over time: scale:	Hardness test:	Staining: Brushed:	Bevel:	Finishing:
Oak Rustic 550049079		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Nature 550049070		least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Nature BR 550049069		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Mat
Oak Premium 550049076		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Select 550049080		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Ash Spice 550049057		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Kempas 550049064		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
African Mahogany 550049056		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Merbau 550049065		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Ash Cognac HG 550049098		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Red Oak Coffee BR 550049082		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Mat
Oak Java BR 550049067		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Mat
Oak Graphite 550049071		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Vintage BR 550049068		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Walnut 550049090		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Chocolate BR 550049077		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Mat
Oak Cocoa 550049078		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Saharan 550049073		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Ash Tramku 550049072		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny
Oak Maroon 550049093		+ least	softer harder	softer	oil COLOURED	bevel	protec [®] Shiny

BOLERO COLLECTION

Product name and product code:	Which Bolero is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining:	Brushed:	Bevel:	Finishing:
Oak Nature BR 550035017		+ least more moist		softer harder				
Oak Copper 550035016		+ least more moist		softer harder				
Oak Ebony 550035019		+ least more moist		softer harder				
Ash Caramel BR 550035011		+ least more moist		softer harder				
Ash Cognac Grey BR 550035012		+ least more moist		softer harder				
Ash Coffee White 550035013		+ least more moist		softer harder				
Ash Winter 550035014		+ least more moist		softer harder				

SAMBA COLLECTION

Product name and product code:	Which Samba is best for you?	Color variation over time:	Color variation scale:	Hardness test:	Staining:	Brushed:	Bevel:	Finishing:
Ash White 550051030		+ least more moist		softer harder				
Oak Cream 550051039		+ least more moist		softer harder				
Beech Original 550051033		+ least more moist		softer harder				
Oak Nature 550051038		+ least more moist		softer harder				
Ash Golden 550051029		+ least more moist		softer harder				
Oak Brandy 550051035		+ least more moist		softer harder				
Oak Honey 550051037		+ least more moist		softer harder				
Oak European 550051040		+ least more moist		softer harder				
Oak Antique 550051036		+ least more moist		softer harder				
Merbau 550051034		+ least more moist		softer harder				
African Mahogany 550051026		+ least more moist		softer harder				
Ash Smoked 550051028		+ least more moist		softer harder				
Ash Caramel 550051045		+ least more moist		softer harder				
Ash Randy 550051046		+ least more moist		softer harder				
Oak Arctic 550051047		+ least more moist		softer harder				
Oak Vanilla 550051048		+ least more moist		softer harder				

ACCESORIES FOR HARD FLOORINGS

PARQUET

ACCESS
PAROUET



ACCESORIES

ACCESSORIES FOR HARD FLOORINGS

CLEANING AND MAINTENANCE

PARQUET

By finding the right design for your home you have started the magic journey through Tarkett Accessories World. Enrich your home with Tarkett Wood Flooring Accessories line. Choose between various skirting profiles. Keep your wood flooring clean and attractive throughout years with Tarkett Wood products.

UNDERLAYMENT

Underlayment is crucial for successful wood flooring in general. Without smooth and solid subflooring, the finished wood flooring could fail or look very bad in a short amount of time. You may rely on our over a century-long experience in manufacturing and installing wood flooring.

Tarkoflex underlayment is a unique all-in-one underlayment which provides fast setting up, immediate consumption and no additional expenses in adhesives usage.



Tarkoflex underlayment

Cork underlayment

Tarkoflex underlayment

Cork underlayment

WOOD SKIRTING AND MOLDINGS

A skirting will make your wood flooring look even more refined. It's the ideal way to finish a wall in style. Professional designers carefully matched all Tarkett Wood flooring collections with a wide selection of skirting and hence balanced function and aesthetics, short-term cost with long-term investment and sustainability with performance. The results is more than two hundred floor and skirting matching combinations which can be in harmony, contrast, gradation or balance, all designed to create the perfect finish to your walls!

Structure of product:

- Support material – soft wood
- Adhesive
- High quality real wood veneer


Lacquer surface treatment with UV-process

TARKETT CLIPS

Tarkett Clips is a new technology for finishing your flooring. Clips mechanism is extremely user-friendly. To install Clips, follow the next steps:



3D RENDER

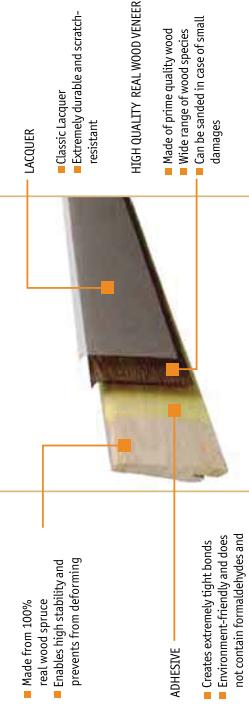

Tarkett Cleaner

Tarkett cleaner is an efficient cleaner for all types of wood flooring, very economical in use. Tarkett Cleaner is used for daily cleaning and is suitable for both domestic use and public environments.



Tarkett Refresher

Tarkett Refresher varnishes wooden floors.



Tarkett Cleaner Set

This cleaner set will help you with the maintenance of the wood flooring with an minimal effort. It includes an adjustable size mop and is the floor cleaning solution that will clean your wood flooring and make it shine without leaving it sticky or slippery.



OTHER WOOD ACCESSORIES

Protective pads

One of the easiest ways to help your wood flooring last longer is to prevent damage done by furniture legs. Even when you sweep and vacuum and think the floor is clean of grit, a chair can still damage a beautiful wood floor. Scratching occurs in wood and wood or metal and wood contacts as chairs slide back and forth. Floor protector pads are inexpensive compared to the cost of repairing the floor.



Pipe covers

Tarkett's pipe covers are a perfect solution for finishing flooring in the radiator area. They will completely transform the look of your radiator and give it a fresh, trendy and modern touch. These one-of-the-kind products provide the radiator pipes with a refined look. Pipe covers are made of solid wood in a variety of species and dimensions. We provide solutions for single and double pipes.



Protective chair mat

Protective chair mat protects the floor against damages caused by movements of chairs in home offices. The usage of chair mats increases the lifetime of wood flooring and gives a quiet and flat running surface for swivel chairs. This product is virtually unbreakable.



Find all skirting designs with matching schemes on <http://www.tarkett.ru/Accessories.aspx>

WOOD FLOORING INSTALLATION GUIDE

Main information

Tarkett Wood flooring offers a beautiful variety of options – from species and color, to plank widths and finishes. We developed an enhanced locking system, T-lock, and the best finish in the industry. Proteco to enable fast and quick installation and immediate flooring consumption.

Tools and Accessories needed

Floating installation	Glue-down installation
Fast, simple installation	Takes slightly longer to install - the adhesive needs to be applied and any excess glue has to be removed
Maximum strength of joints achieved straight after assembling	Joints become fully resistant only after the adhesive is completely dry
The floor is ready to use immediately	The floor can be walked upon after 12 hours (minimum) and is fully bonded after 1-2 days
Installation errors can be corrected immediately	Installation errors cannot be corrected easily
No need to use glue	Use of an adhesive is essential
Damaged boards can be easily replaced	Easy replacement of damaged boards is not possible
Easy access to the floor surface (allowing possible repairs and maintenance work)	The floor's surface is not easily accessed
The floor adjusts easily to the temperature and humidity changes in the room	Correct temperature and humidity levels should be adhered to
Quick and easy disassembly	Quick and easy disassembly is not possible
The parquet can be reused in another room	The floor cannot be re-assembled
Installation acquire transition moldings	Installation does not require transition moldings
No limitation in installed area	No limitation in installed area without transition moldings - 240 m ² – max 12x20 m
Very stable construction	slightly more stable construction

Table 1. Floating vs. glue-down installation

Important information - Installer/Owner responsibility

It is EXTREMELY IMPORTANT that you read and understand this information completely prior to starting, since improper installation can void the warranties. Please, EXAMINE all of this flooring BEFORE installing this material. CAREFULLY EXAMINE this merchandise for color, finish, quality and style order BEFORE installing this material. Wood flooring installed with visible defects is not covered under warranty and Tarkett declines responsibility for any costs incurred when plank(s) with visible defects have been installed. Remember – wood is a natural product that can vary in color, grain and contains natural characteristics which vary from plank to plank and this is to be expected. Tarkett does not warrant against these natural variations from plank to plank or variations from sample to plank. Remember – if you are not satisfied with the flooring prior to installation, simply return the cartons to your dealer for a full replacement. Accepting or rejecting the material must be done on full shipment quantities only, not carton by carton or plank by plank.


Tarkett wood floating installation



Picture 1: Before installing the first row, the part of the groove profile which sticks out must be cut off.



Picture 2: First row. Remember that the floorboards should preferably run along the length of the room. Start in a left-hand corner with the groove side against the wall and work towards the right. The next board is angled down into the short end of the previous board so that it slides into place. Press spacers between the floor and the wall to create an expansion gap of 8-10mm.



Picture 3: At the end of the row, turn the last board so that it lies tongue to tongue. Push the short and tightly against the wall. Mark where to cut with a pencil 8-10mm from the previous board's short end to give you an expansion.



Picture 4: Start the second row with the rest of the cut board. Lay the board in place in the groove without pressing it down. Angle the next board into place along the short end. Then push board until the long side is in place in the groove. The board should slide in the short end joint. Continue in the same way with the next board until the whole row is in place.



Picture 5: When the whole row is in place in the groove, press the whole row down at the same time to give an even and level join.



Picture 6: A tip for efficient and fast installation is to lay down the new row of boards next to the previous row. Fix the short end joins in place with any spare bits of board, then lift the whole row into place and fold it down.



Picture 7: Final row. When you get to the final row, it is possible that it will not fit width wise. In this case, place the final board with the tongue facing the wall, on to a flat surface, edge with the last board on top and measure the gap to running the tongue to the wall. Cut off the tongue in order to keep an expansion gap.



Picture 8: If there is no room to fold down the last board, it can be slid in from the side instead. In order to do this, the tongue of the board has to be made level. Use a chisel to shave off the part of the tongue which raises the bump along the top of the outside edge.




Picture 9: Place a thin bead of adhesive along the top edge of the modified tongue. Then tap the board sideways with a pull bar. Finish by placing spacers in the expansion gap between floor and wall. Now that the floor has been installed, skirtings and any joining strips can be fitted.



Picture 10: If the long side of the board meets a pipe. Drill a hole with a diameter approx. 10mm greater than the pipe diameter to give an expansion gap around the pipe. Mark with a pencil where to saw. Saw off the pipe, closest to the wall. Cut at an angle.



Picture 11: Tap the board in position, glue the loose piece in place, fit a spacer against the wall and cover with pipe collars.



Picture 12: Doorframes can be removed and moved up, but it is usually easier to saw them off. Use a loose floorboard as a height template and saw the frame with a fine-toothed saw. Push the floor under the frame. Ensure that the floor is not wedged between the doorframe and the frame.

Tarkett wood glue-down installation



Picture 1: Before installing the first row, the part of the groove profile which sticks out must be cut off.



Picture 2: Measure out the first row of boards by laying them out without any adhesive.



Picture 3: At the end of the row, turn the last board so it lies tongue to tongue. Push the short end tightly against the wall. With a pen, mark where to cut 8-10 mm from the end of the previous board, to make it easier to get the board into place.



Picture 4: Cut the board to the right length with a handsaw V (from the top of the board) or a circular saw (from the underside).



Picture 5: Take up the row of boards you laid out. Spread adhesive over the subfloor where the whole row of boards will lie. Lay the boards down one by one and wedge them against the wall.




Picture 6: Repeat points 2-4, take up and spread adhesive. Start the second row with the rest of the board cut from the first.




Picture 7: Angle the next board into place along the short end. Then push the board until the long side is in place in the groove. Do not press the board down into the adhesive. Continue in the same way with the next board until the whole row is in place. Lay the board in place in the groove without pressing it down.




Picture 8: Go back along the row of boards, pressing them down against the subfloor (into the adhesive). Continue as in points 6-8.



Picture 9: The final row of boards usually needs to be cut along its length. With its tongue against the wall, place the final board exactly on top of the last-but-one board. Place a spare bit of board on top and measure the gap by turning the bit of board along the wall and marking with a pencil where to cut the last board. Saw off the last board. The board does not need to be cut if the tongue which sticks out must still be cut off (to give the floor room to move). Saw and press down the final row of boards.



Picture 10: If there is no room to fold down the last board, it can be slid in from the side instead. In order to do this, the tongue of the board has to be made level. Use a tool such as a chisel.



Picture 11: Doorframes can be removed and moved up, but it is usually easier to saw them off. Use a loose board as a height template and saw the frame with a fine-toothed saw, risin the floor under the frame (see also point 10) to shave off the part of the tongue which raises like a bump along the top of the outside edge.




Picture 12: Out adhesive, lay the last row of boards and tap them into place using the pull bar.

Is it possible to replace damaged boards?

Yes. One of the numerous advantages of prefinished wood floorings is that it is very easy to replace a damaged board. Replacing damaged floor boards is quick, clean and inexpensive compared to in-depth sanding and finishing. It only takes about 15 to 20 minutes per board, which is why we suggest keeping a few boards on hand after installation.



Picture 1: In case of serious damages of your wooden floor (scratches, or damages resulting from impact of heavy or sharp objects), the easiest and the most efficient way to repair it is to change damaged board.



Picture 2: Change of damaged board is done in following way: First cut off the board with a circular saw, but be sure that you set the sawing depth max. as the thickness of wood flooring (in this case 14 mm). After that saw a 'V' from each corner, and then saw non short tend to short tend to connect these 'V' cuts.



Picture 3: Remove the center section from the board. To be sure not to damage the neighbouring boards, use a chisel and manually extend the cut all to edges of neighbouring boards.



Picture 4: Remove the short ends, and then remove the long sides which are connected with neighbouring boards.



Picture 5: Vacuum carefully all wood dust and smaller wooden parts, to make area free and prepared for laying new board.




Picture 6: The new board that will be installed, must be prepared first. After you checked the board size, saw off the underside of the short ends and long side, but be careful not to damage top surface and not to remove board tongue.



Picture 7: Preparation of layers is done by spreading glue on a thin laminated foil, or on a piece of veneer, first spreading the glue on veneer below the neighbouring boards, and then spreading glue on a pair of veneer which should fix the new board.



Picture 8: After that spread the glue on a free profile of neighbouring boards and on tongue on board.



Picture 9: Install the board.



Picture 10: Use weights to press it down for at least three hours, to be sure that the board is well fixed – glued on neighbouring boards.

WOOD FLOORING INSTALLATION OPTIONS

General Installation Tips

General Installation Tips

- Floor boards should be opened just before the installation, and all boards from opened cartons must be installed before any pauses.
- When installing 1-strip products, the floor should be installed from several cartons at the same time to ensure good color and shade mixture.
- When possible, preselect and set aside the boards that blend best with all horizontally mounted moldings used to provide a uniform final appearance. Install these boards adjoining the moldings.
- Wood is a living material which means that a floating wood flooring will expand or contract, despite the multilayer construction design depending on how the indoor climate changes through the year.



Therefore, you must leave a space (called an expansion gap) of at least 1.5 mm per meter width of floor, minimum 8-10 mm between the floor and the wall around the whole room. This also applies between the floor and thresholds, pipes, steps, pillars, fireplaces, stone floors etc.

- Be attentive to stagger the ends of the boards at least 50 cm in adjacent rows. This will help ensure a more favorable overall appearance of the floor.

- If the last row of boards is narrower than 5 cm or if the wall is not straight, the first row of boards should be cut.
- Half-boards from the package are used for beginnings or endings of different rows. Do not place them in the central part of the construction.

YOU AND YOUR INSTALLER ARE RESPONSIBLE TO INSPECT THE FLOORING PRIOR TO INSTALLATION. WE ACCEPT NO RESPONSIBILITY FOR LIABILITIES, CLAIMS OR EXPENSES, INCLUDING LABOR COSTS, WHERE THE FLOORING WITH VISIBILE DEFECTS HAS BEEN INSTALLED.

Jobsite Conditions

It is the installer/owner's responsibility to ensure that the jobsite conditions and jobsite subfloors are environmentally and structurally acceptable prior to the installation of any hardwood flooring – permanent air conditioning and heating systems should be in place and operational (the installation site should have a consistent room temperature of 18 – 27 °C and humidity of 30 – 50% for 14 days prior to and during installation and until occupied). The manufacturer declines any responsibility for failures or deficiencies of wood flooring resulting from or related to subfloor, subsurface or jobsite environmental conditions.

Subfloor Conditions

All substrates must be clean, flat, dry, and structurally sound.

- CLEAN - Subfloors must be clean and free of dirt, curing compounds, sealers, drywall mud, paint, wax, grease or other materials that may affect the integrity of the flooring material or adhesives used to install the flooring.
- LEVEL/FLAT - Within 3 mm in 2.5 m and/or 1.2 mm in 1 m. Sand high areas or joints. Follow the instructions of the leveling compound manufacturer, but make certain that the leveling compounds are completely RIVY before the beginning of the installation. Leveling materials must provide a structurally sound subfloor that does not affect the holding power of the fastener.
- DRY - Check and document moisture content of the subfloor using the appropriate moisture test. Concrete subfloors must be at least of 30 days old before the testing begins. Moisture content of the subfloor must be less than 2%, measured by the CH method.
- STRUCTURALLY SOUND - Nail or screw any areas that are loose or squeaky. Flatten the edge swell if necessary. Replace any water-damaged, swollen or delaminated subflooring or underlayment. Avoid subfloors with excessive vertical movement. Optimum performance of wood floor covering products occurs when there is little horizontal or vertical movement of the subfloor. If the subfloor has excessive vertical movement (deflection) before installation of the flooring, it is likely it will also have it after the installation of the flooring is complete.

Subfloors with Radiant Heat

NOTE: Always make certain that the product selected is recommended for this type of application. The Tarkett wood products made of beech and maple are not recommended to be installed over radiant heat subfloors.

- System must be operated and heated for at least 14 days prior to the beginning of the installation.
- Turn off the heat and let the subfloor cool down to a room temperature 3–4 hours prior to starting the job.
- BEFORE the installation begins, make sure that the heating system is designed and controlled for wood flooring and that the circuit does not include other floor covering types. Failure to do so may cause excessive heat damage and shrinkage.
- After the installation, turn the heating system back on immediately. The finished floor surface must not exceed 25 °C throughout the life of the floor.
- Radiant heating systems normally create dry heat that can lower interior humidity levels. It may be necessary to add humidity with humidifiers to maintain the recommended levels (30–50%). and prevent damage to the wood flooring.
- The flooring should be end-glued over radiant heat to reduce longitudinal shrinkage. Wipe excess adhesive away immediately.

Subfloor/underlayment requirements

Tarkett wood flooring can be installed on the following surfaces:

- Concrete and cement screed
- Ceramic Tile, Terrazzo, Slate & Marble
- Wood subfloor
- Fully adhered vinyl sheet, resilient tile and tileomer

Concrete Subfloors

New concrete slabs require a minimum of 30 days drying time before covering them with a wood flooring until they have moisture content less than 2%.

Ceramic Tile, Terrazzo, Slate & Marble

Ceramic tile and terrazzo should be removed with an appropriate cleaner/scraper. All waxes and sealers must be removed with an appropriate cleaner/scraper. Lines with a cement latex fortified leveling compound (min. 3mm).

Wood subfloors

The wood subflooring materials must not exceed 10% moisture content. Use a reliable wood moisture meter to measure moisture content of both the subfloor and the wood flooring - to determine the proper moisture content. The difference between the moisture content of the wood subfloor and the wood flooring must not exceed 4%.

Vinyl sheet, resilient tile and tileomer

Materials must be fully spread and secured to the subfloor. Do not install over perimeter glued floors.

INSTALLING THE FLOOR

The stability of the Tarkett multilayer wood construction allows several installation methods in residential areas – it can be floated or glued over most subfloors including concrete. Having an over a century-long experience in manufacturing and installing floors, Tarkett proudly recommends a floating installation since it offers a wide spectrum of advantages as it enables fast setting up, immediate consumption and elimination of additional expenses in adhesives usage (See floating vs. glue-down installation table on pages 5/ and 58). Rather than being attached to the subfloor, boards are simply joined together and rest on the surface, hence the term 'floating'. Wedges are placed around the perimeter of the room, to allow an expansion gap. This is then covered with beading to create a neat transmission between the floor and the wall. Tarkett wood collections feature glueless T-lock, 'click and lock' systems, whereby the boards literally snap together, automatically lining up to create a perfect flush finish. If any mistakes are made during the installation, the boards can be unlocked and reattached. Floating wood flooring can be installed on most dry, level surfaces and as each system differs in nature, specialist tools are often available. To reduce footstep noise and protect against moisture, a thin underlayment is laid between the wood flooring and the sub-floor before installation. On the other hand, with the glue-down installation, the wood planks are glued directly to the subfloor. Adhesive is spread onto the subfloor using a trowel and the planks are set into the glue.

Wood accessories installation

The range of the Accessories products has been divided into 4 groups:

1. Underlayment
2. Skirting and molding
3. Cleaning tools
4. Other Wood Accessories

Underlayment - Unique underlayment solution

If you're interested in installing a floating wood floor, then an underlayment is necessary. Since floating wood floorings are installed with a "free float" method where the wood is not actually attached to the sub floor, it's necessary to install a floor muffer underlay-ment before the wood is laid down. The wood flooring underlayment goes over the underlayment. In most cases, the wood flooring can be applied to the floor muffer underlayment by using glue or by locking the boards together in a glueless format. Composition cork rolls should be dispatched in packages that provide suitable protection and which are sufficiently watertight to keep the moisture content of the cork. Packages should be stored shielded from direct sunlight, heat and humidity. The roll should be unpacked immediately before installation. Cork underlayment is required over the entire surface on which we want to install the flooring. Strips of Tarkett cork underlayment need to be set directly next to each other with no gaps and overlaps. If necessary, the strips can be fixed to each other in order to prevent them from spacing during installation. Cork underlayment can't be used on concrete or any other basis that has a moisture content greater than 2% (CM).

Tarkoflex underlayment

- Step 1 – Please, place the foil with the Tarkett sign, down to the base. The sponge part of the underlayment must be on the upper side. The foil is used with the aim of making a moisture barrier.
- Step 2 – It is necessary to overlap the 20cm thick sponge over foil. Do not overlap sponge over sponge.
- Note: these two kinds of underlayment have the role of the radiator of sound and air.

Tarkett has launched the Cork Underlayment!

- A 0.2 mm PE foil needs to be placed under the cork underlayment. This foil has a steam protection role. Cork is a natural material and it needs to be protected from moisture.



WOOD ACCESSORIES INSTALLATION

Underlayment, skirting and molding

Skirting and molding

a) Skirting

Our Skirting range is developed to satisfy all aesthetic and performance criteria. We offer you more profiles and more matching options than ever before: 80 x 20 mm, 60 x 23 mm and 60 x 16 mm. Tarkett skirtings are designed to perform well by being easy to install, remove or reinstall in little time and with less disruption.

Our veneered profiles are natural products which are produced in an environmentally friendly way. New wood types are constantly being added so we can fulfill every customer's needs.

b) Installation of skirting by using Clip Star mechanism:

1. Screw the Clip Star mechanism in the range of every half meter. Leave empty space between the placed Clip Stars.

2. Place the skirting on the Clip Star mechanism.

3. During cutting corners, and before the mentioned action, it is necessary to put on the skirting Clip Star mechanism, that will determine the angle under which it is placed to the wall. Skirting is not fixed to the wall under same angle if it is installed with or without Clip Star mechanism. If you do "tailoring" without Clip Star mechanism, match between two skirtings won't be good.

c) Skirting installation with the use of glue:

1. You must do the skirting "tailoring" in order to satisfy your space's needs.

2. Place the Montage joint on every 30 cm of the skirting around 1 cm in thickness.

3. Place the skirting against the wall and put small head screws on some parts. The role of the screws is to hold the skirting while the joint is getting dried.

4. If your wall is not straight you should close the band part of wall with Acrylic joint into several layers. The other solution must be cutting skirting and continue with placing the same on every band places in order to accomplish non straight part of skirting with the mentioned.

Note: Acrylic joint must be placed between skirting and wall to fill the holes. This joint is in white. Between the skirting and parquet acrylic joint in the wood flooring color must be used.

d) Skirting profile :

Here we present you all skirting profiles:

1. 60 x 16 mm profile



Technical Drawing

2. 60 x 23 mm profile

Technical Drawing

3. 80 x 20 mm profile

Technical Drawing



e) Molding


Decorative moldings are architectural details installed to trim wood floors provide a transition between various floorings or make surface levels more even. If carefully installed, they can enhance any decor and increase the value of any home. They will help to give a finished look to your room.

• Molding should be "tailored" according to space needs.



• Place the holder of molding on the match between two different floorings. Take care about expansion gaps.

f) Combistar

Combistar is a perfect solution for spanning gaps between different floor heights and types. Flexible turning system enables easy adjustment of height and slope. Different Combistar heights can be obtained by shortening the profile with the carpet knife.





Reducer
Reducer is a perfect solution for sloping the flooring in the points where a dressed edge is required, e.g. where the floor meets a front door, patio door or an inset door mat.



TECHNICAL FOLDER

End profile

End Profile is a perfect solution for finishing the flooring in the points where a dressed edge is required, e.g. where the floor meets a front door, patio door or an inset door mat.



TECHNICAL CHARACTERISTICS

Accessory name:	Polymer chair mat
Dimensions:	150 x 120 cm, 120x90 cm
Material:	Polycarbonate semi-transparent panel
Intended for:	Protection of wood flooring on the places where it is disposed to roll chair exploitation

TECHNICAL CHARACTERISTICS

Accessory name:	Polymer chair mat
Dimensions:	150 x 120 cm, 120x90 cm
Material:	Polycarbonate semi-transparent panel
Intended for:	Protection of wood flooring on the places where it is disposed to roll chair exploitation

Protective chair mat
Tarkett's Protective chair mat protects the floor against damages caused by movements of chairs in home offices. The usage of chair mats increases the lifetime of wood flooring and gives a quiet and flat running surface for swivel chairs. This product is virtually unbreakable and 100% PVC-free. In addition, our chair mats are exceptionally clear, enhancing the natural beauty of your wood floor.



Pipe covers
Tarkett Pipe covers are a perfect solution for finishing the flooring in the radiator area. They will completely transform the look of your radiator and give it a fresh, trendy and modern touch. These one-of-the-kind products provide the radiator pipes with a refined look. Pipe Covers are made of solid wood in a variety of species and dimensions. We provide solutions for single and double pipes.




WOOD ACCESSORIES INSTALLATION

Other wood accessories

Clips for fixing skirtings:

Clips for fixing skirtings allow cables to be hidden behind the profiles. This new technology enables easy and invisible mounting of skirting boards to the wall.

Repeated mounting can be performed easily without any tools which makes this system adjustable and functional.

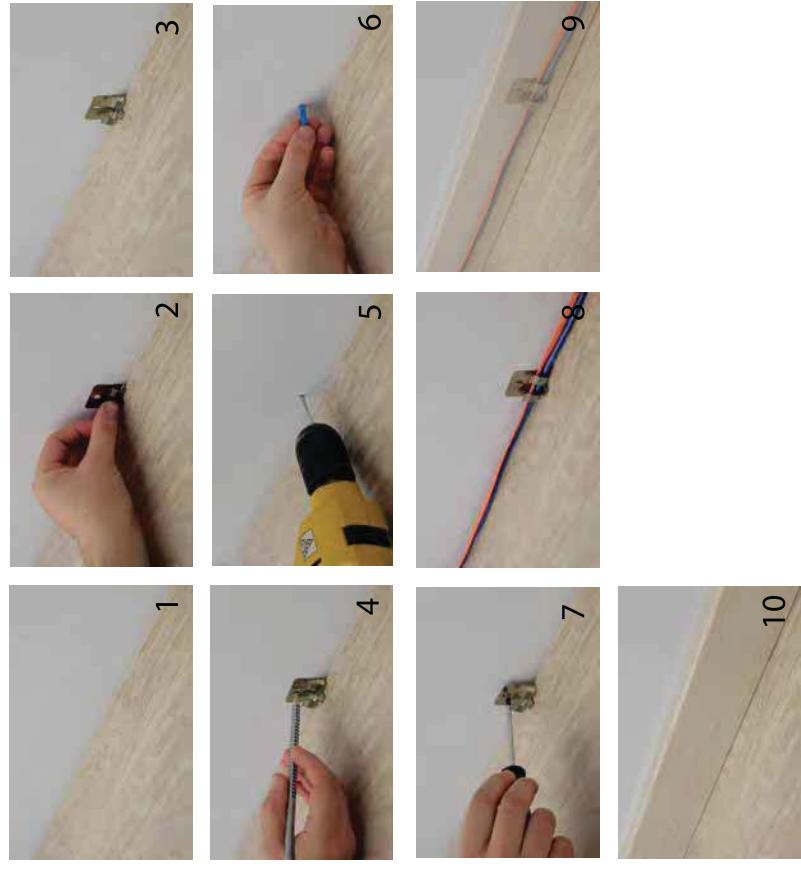

CARE AND MAINTENANCE

Tarkett
Cleaner is
available in a
bottle of 0,5l
It is also
available in
a 1l bottle.



Tarkett Cleaner - is a liquid, alkaline agent for mechanical cleaning of floors. The combination of active substances provides a very good cleaning of all kinds of impurities and quick drying. Method for normal cleaning: When it comes to spot cleaning, just sprinkle the agent on the surface using the spray bottle and simply mop the surface. Product information: neon-active substance sodium citrate, ethanol and water pH=8. flavor: citrate

Tarkett
Refresher is
available in a
bottle of 1l.



Tarkett Refresher - cleans and protects all prefinished wood floorings. Working method: First clean your wood flooring using a damp-mop to remove dirt and dust. Apply a thin layer of Tarkett Refresher with a clean moistened mop and leave it dry for approximately 30 minutes before using for flooring. Do not walk on the flooring while it is getting dried. A thin layer of Tarkett Refresher is now protecting your wood flooring. If the wood flooring has been treated with wax or polish products before, first clean it with special cleaning liquids for polish. Dilution: Please, do not dilute or use any additional chemicals. For excess dirt, apply more Tarkett Refresher and rub harder. Please, do not go again over areas that have started to dry. Clean the mop frequently with water when applying and after use. Guideline for using Tarkett Refresher: It is recommended that Tarkett Refresher should be used once a month.

Now includes:
With telescopic pole Microfibre mop cover - Tarkett Cleaner



Tarkett Cleaner Set - Tarkett Cleaner Set is a unique cleaning system for effortless wet or dry cleaning of any Tarkett wood flooring. Tarkett Cleaner Set includes a floor sweeper with an adjustable handle, microfiber cloths and a regular maintenance solution-Tarkett cleaner.

CARE AND MAINTENANCE

INSTALLER'S TIPS AND ADVICE

The finishing technology used for Tarkett floors makes them the best choice for easy maintenance. To preserve all the beauty of your Tarkett wood flooring, simply follow very simple protection suggestions. Tarkett wood floorings can be cleaned in three quick and easy steps.

1. Protecting your investment

2. We recommend that you:

- Sweep or vacuum regularly to rid your floor of dust and eliminate abrasives that can scratch the finish.
- Wipe up any spilled liquid quickly from your floor.
- Watch out for high heels and some kinds of sport footwear, particularly if they're worn or damaged. Note: Only water and sand are worse enemies of wood flooring than high heel shoes. In fact, high heels can damage any floor covering, even cement.
- Put mats outside and inside the entrances to prevent the buildup of sand and dirt on the floor.
- Put mats in front of the kitchen sink, the dishwasher, and all kitchen work stations to protect your floor from kitchen mishaps like dropped utensils and spills of water, detergent, and food.
- Avoid rubber or other dense mat backings that prevent airflow, abrasive grit and moisture.
- Attach felt pads under any furniture or chair legs to ease movement and prevent scratches. Keep the pads clean and replace if damaged.
- Protect the floor when moving furniture or heavy objects. Use a mat turned upside down with a slightly smaller piece of plywood on top of it. Place furniture on top and slide it.
- Maintain humidity levels between 30 and 60%, for your own health as well as for the protection of your floor and wooden furniture. Wood is a natural material that reacts to relative humidity variations when moisture is absorbed or released.
- Avoid exposing your floor to sunlight and intense artificial light, which can cause wood to change color. This is a completely normal and natural phenomenon. The lighter the wood, the more pronounced the change will be.
- Move your carpets and furniture occasionally and use a minimum number of light sources to keep the color uniform.
- Note: Color change is not caused by the yellowing of the finish; it is a natural change of the wood's color.

We strongly recommend you to follow the Do and Don't lists and play by our unique Installation rules.

Do and don't list:

1. **DO** - Store in a dry place, being sure to provide at least ten centimeters of air space under cartons which are stored upon concrete floors. Flooring should not be delivered until the building has been enclosed with windows, the doors are in place, and cement work, plastering and all other "wet" work is completed and dry.
2. **DO** - Installation must be in strict accordance with the instructions and recommendations found in the Tarkett installation instructions guide. The commercial installation of Tarkett wood residential wood flooring and wood flooring installed in full bathrooms with a shower or tub are not covered by warranty.
3. **DO** - It is the installer/owner's responsibility to ensure that the jobsite conditions and jobsite subfloors are environmentally and structurally acceptable prior to the installation of any hardwood flooring – permanent air conditioning and heating systems should be in place and operational (the installation site should have a consistent room temperature of 18 – 27°C and humidity of 30 – 60% for 14 days prior to and during the installation and until occupied).
4. **DON'T** - Do not raise or lower the temperature of the subfloor radiant heat system by more than 2.8°C per day when turning the system on and off. The wood surface temperature must never exceed 27°C.
5. **DON'T** - Beech and maple floors installed over a radiant-heated slab are not covered by this warranty.
6. **DO** - Protect the floor when moving furniture or heavy objects. Use a mat turned upside down with a slightly smaller piece of plywood on top of it. Place furniture on top and slide it.
7. **DO** - Move your carpets and furniture occasionally and use a minimum number of light sources to keep the color changes uniform.
8. **DO** - Maintenance must be in strict accordance with the instructions and recommendations found in the Tarkett Care and Maintenance Guide. Only Tarkett recommended cleaning and maintenance products are appropriate for use on our products.
9. **DON'T** - Do not clean or wet mop your floor with water. This can permanently damage the wood flooring.

Installation and maintenance rules:

1. **RULE - LEVEL/FLAT**—Within 3 mm in 2.5 m and/or 1.2 mm in 1 m. Sand high areas or joints.
2. **RULE** - Concrete subfloors must be at least 30 days old before the testing begins. Moisture content of the subfloor must be less than 2%, measured by the CM method.
3. **RULE** - Floor boards should be opened just before the installation, and all boards from opened cartons must be installed before some any pauses.
4. **RULE** - When installing 1-strip products, the floor should be installed from several cartons at the same time to ensure good color and shade mixture.
5. **RULE** - Assure uniform final appearance. Install these boards with the adjoining moldings.
6. **RULE** - Wood is a living material which means that a floating wood flooring will expand or contract, despite the multilayer construction design, depending on how the indoor climate changes through the year. Therefore you must leave a space (called an expansion gap) of at least 1.5 mm per meter width of floor, minimum 8-10 mm between the floor and the wall around the whole room.
7. **RULE** - Be attentive to stagger the ends of the boards at least 50 cm in adjacent rows. This will help ensure a more favourable overall appearance of the floor.
8. **RULE** - Please, EXAMINE all of this flooring BEFORE installing this material. CAREFULLY EXAMINE this merchandise for color, finish, quality and style order BEFORE installing this material. Wood flooring installed with visible defects is not covered under warranty and Tarkett declines responsibility for any costs incurred when board(s) with visible defects have been installed.
9. **RULE** - If the last row of boards is narrower than 5 cm or if the wall is not straight, the first row of boards should be cut.
10. **RULE** - The wood subflooring materials must not exceed 10% moisture content.

FREQUENTLY ASKED QUESTIONS

Frequently asked questions

• In which rooms can I install a Tarkett wood flooring?

Tarkett wood flooring is suitable for interior residential applications from hallways, through kitchens, to bedroom and living-room areas. Basically, Tarkett wood flooring is perfect anywhere in your home except around bathtubs and shower areas. Wood flooring throughout your home can add warmth, instill harmony and natural beauty to your home combined with an extraordinary quality.

• How long does a wood flooring take to install?

Installation can usually be completed within one day and the floor is ready to use immediately. **NOTE:** Our factory certified and thoroughly trained technicians make installation a snap. Consult store personnel for an installation appointment that will fit your schedule.

• Will I need to measure the space where the floor is to be installed?

No. An installer will measure your home for you and will provide a written proposal with no obligations to you.

• What does it cost to install a Tarkett wood flooring?

The estimate will detail all labor charges and Tarkett brand accessory costs (molding profiles, floor cleaners etc.). If you compare the total installation price with other stores' prices, you will find that Tarkett's Independent Dealers offer you the best package, service and value for your money.

• What do I need to do to prepare for my wood flooring installation?

To ensure the smoothest installation possible, you should do the following things:

- Remove all breakables like china, porcelain figurines, collectibles etc.
- Strip the beds
- Detach any wiring such as power cords for TVs, stereos and computers.
- Installers will usually move your furniture, but cannot assume responsibility for any damage incurred while doing so.

• What is my responsibility regarding the wood floor installation (with or without assistance of installer)?

We urge you as the final inspector to inspect for proper color, finish, style and quality of your wood floor PRIOR to installation. Hold out pieces that may not be acceptable once installed.

• Should I be aware of any special conditions?

It is important that moisture and humidity are controlled in all indoor environments and that applies especially to your home. Architects recommend a humidity range between 30 and 60% and a temperature of at least 18°C for all interiors before, during and after the installation. It is the Installer/Owner's responsibility to ensure that the conditions are acceptable prior to the installation of the wood flooring. The manufacturer declines any and all problems with the hardwood flooring that are related to or attributed to improper jobsite conditions.

• Do I need to plan the installation direction?

If the room is fairly square, the length of the boards should run parallel to the incoming light.

• How to install a wood flooring in hallways?

In long, narrow rooms such as hallways, it is best to install the boards along the length of the room.

• Over which surfaces can a Tarkett wood flooring be installed?

Tarkett factory trained installers will put your home through a thorough inspection process. Surfaces such as concrete and old floor coverings (except carpet) are perfect subfloors for high performance products to be installed over. In each case, the subfloor must be sound, level and dry and must meet the requirements in the Conditions section. This is for the floating type of installation.

• Is it possible to install a Tarkett wood flooring over a radiant heated slab?

No problem. Tarkett wood floors qualify for installation over properly installed radiant heated floors. These floors, however, must have a moisture barrier installed. The heating system must not have "hot spots" that exceed 27°C - an even temperature not exceeding 27°C is required throughout the room. Also, beech and maple floors are not suitable for installation over radiant heat.

• How to maintain different wood floorings?

Light colors will show dirt and require more frequent maintenance than dark colors. Walnut, beech and cherry are inherently smooth hardwood and will show scratches and dents more readily than oak. You should consider these facts when making your flooring selection (see Brinell test table - hardness of the wood species).

• Is it possible to refinish your Tarkett wood flooring?

Yes. Despite its long-lasting exclusive finish, your floor will naturally show signs of wear after years of use. In most cases, the finish can be easily restored with a simple application of a quality water-based varnish, compatible with the original Tarkett finish. This type of refinishing is simple and economic compared to in-depth sanding. You have the option of refinishing the whole floor or just a part of it. Ensure that the new gloss level is the same as that of the original finish.

Refinishing steps:

1. Floor must be clean and free of residue and grease.
2. Sand floor surface lightly and evenly with a synthetic scrub pad in order to obtain a uniform finish without damaging the stain of the wood, and to prepare the surface for the application of the varnish.
3. Vacuum and damp-mop the floor to remove dust.
4. Apply the primer before the application of varnish.
5. Apply two coats of varnish.

• Is it possible to refinish Tarkett wood flooring several times?

Yes. Your floor may be refinished many times. However, if you wait too long before refinishing, the varnish may be completely worn off, causing damage to wood and requiring an in-depth sanding. The frequency of refinishing varies according to traffic flow and maintenance. See your Tarkett certified installer to evaluate the overall condition of your floor and have the work done. He can advise you on which type of varnish to use, required drying time and ease of application. Depending upon the time of the year or the state of your floor, it may be a good idea to wait awhile before going ahead with your project.

Note: Remember that varnish is used to protect your floor, not to harden its surface.

• Can I change the color of Tarkett wood flooring?

Yes. Another great advantage of a Tarkett wood prefinished floor is that you can change its color or refinish it to look like new after a considerable wear. Deep sanding will eliminate the micro V joint and uncover the wood's natural color. Simply apply a new stain and revarnish with 3 or 4 coats of water-based varnish.

